

Sunday Morning Audio Checklist

Effective Date 7.24.22

Stage

1. Plug in iPad interface and ensure its charging
2. Check power amps (Figure 1). If off, turn them on.
3. Position Vox wireless road case rack and remove covers.
4. Snap power cable into power port and plug into outlet (Figure 2).
5. Locate stage ethernet cable bundle (blue), usually hanging on wall behind stage audio console, and find cabled labeled "E1".
6. Insert ethernet cable "E1" into Port A on Wireless rack (Figure 2).
7. Assemble both antennas and place them on stands arms with apart.
8. Patch instruments.
9. Patch iPad Interface
10. Make sure both power switches are on. One is located on the bottom on the back of the rack, the other is located on top in the front (Figure 6).
11. Position Item rack on stage.

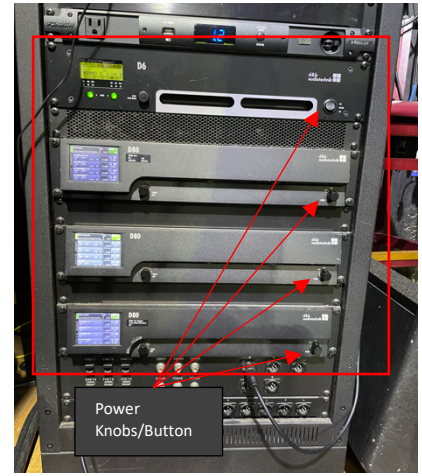


Figure 1 Power Amp Stack (House)

Front of House

Can be done before stage setup is complete.

1. Place DiGiCo Console on Table
2. Remove Cover and Lid
3. Remove IPod and talkback mic from case and place in a convenient location
4. Plug white power strip into outlet.
5. Turn on power switch (located just under power cable port, Figure 4)
6. Find ethernet bundle (blue), usually located underneath the house console. Located ethernet cable labeled "E1".
7. Plug ethernet cable into bottom left ethernet port (Figure 4).
8. Plug in output to power amps (house), labeled main left, main right, subs, fills (Figure 3). Can be found either on floor or plugged into house console
9. Plug in patch to livestream on both the DiGiCo console and the livestream rack.
10. Optional: Perform virtual sound check.

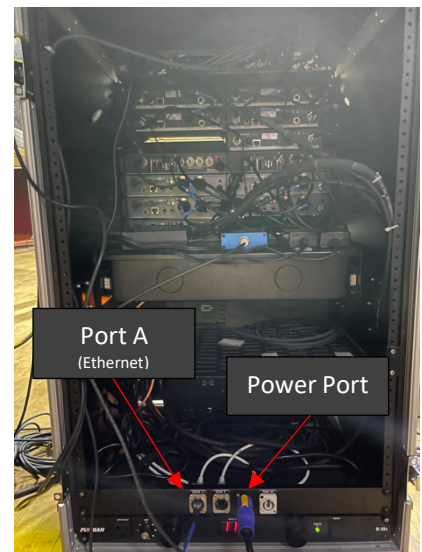


Figure 2: Rear of Wireless Rack (Vox)



Figure 4: FOH Console Rear (Vox)



HFD Output Patches Infinity Hall FOH

Snake is on the floor at FOH location

Connectors are labeled as shown:

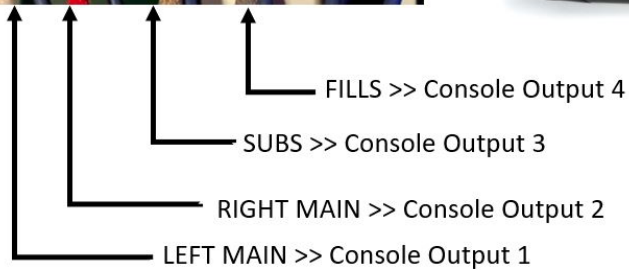


Figure 3: Power Amp Output Patch (House)

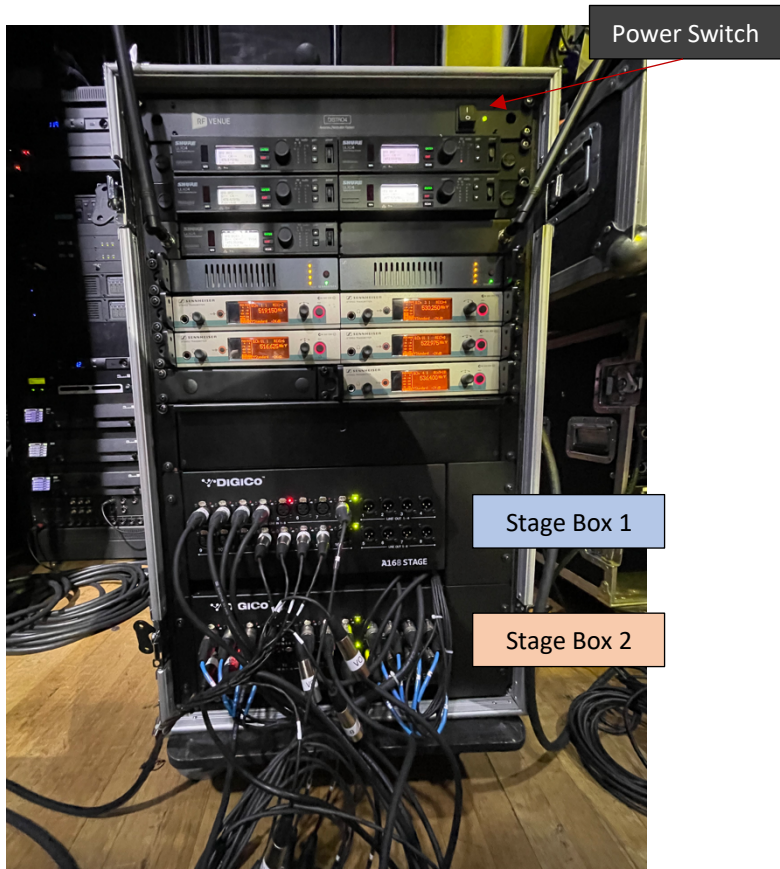


Figure 6: Wireless Rack Front (Vox)

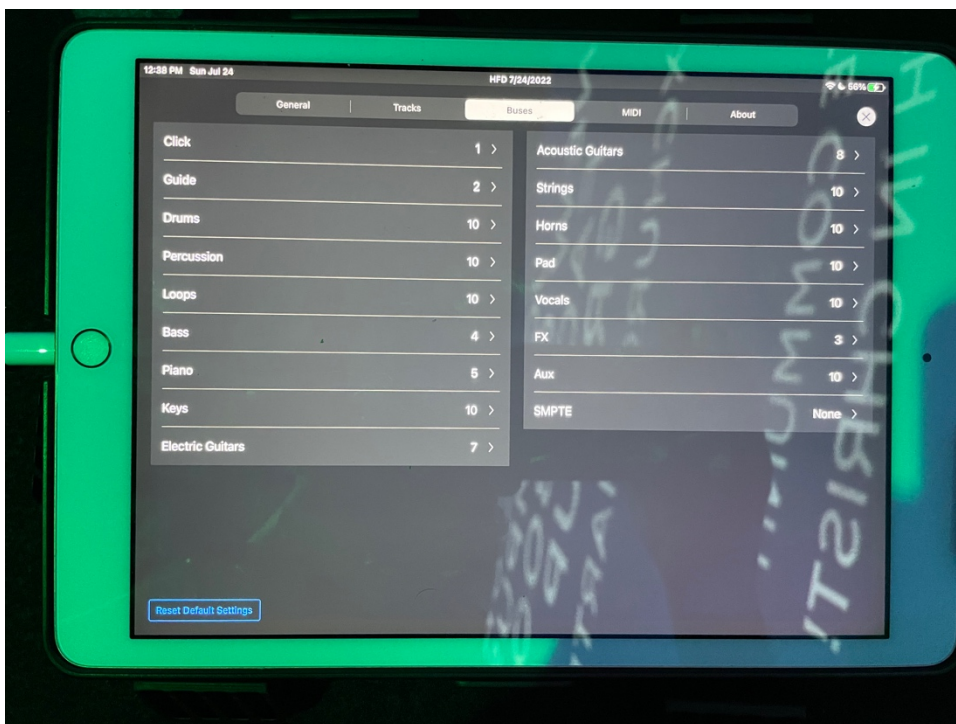


Figure 5: iPad Bus List. Corresponds to XLR ports on back of case.